

DISTRIBUTED BY:

# Sedulitas

PEOPLE | PASSION | PRECISION

info@sedulitas.co.za +27 (0)82 551 4001  
www.sedulitas.co.za


- CO
- CO<sub>2</sub>
- NO
- NO<sub>2</sub>
- VOC
- SO<sub>2</sub>



## INDOOR AIR QUALITY MONITORS

### Sauermann Portable Indoor Air Quality Monitoring System



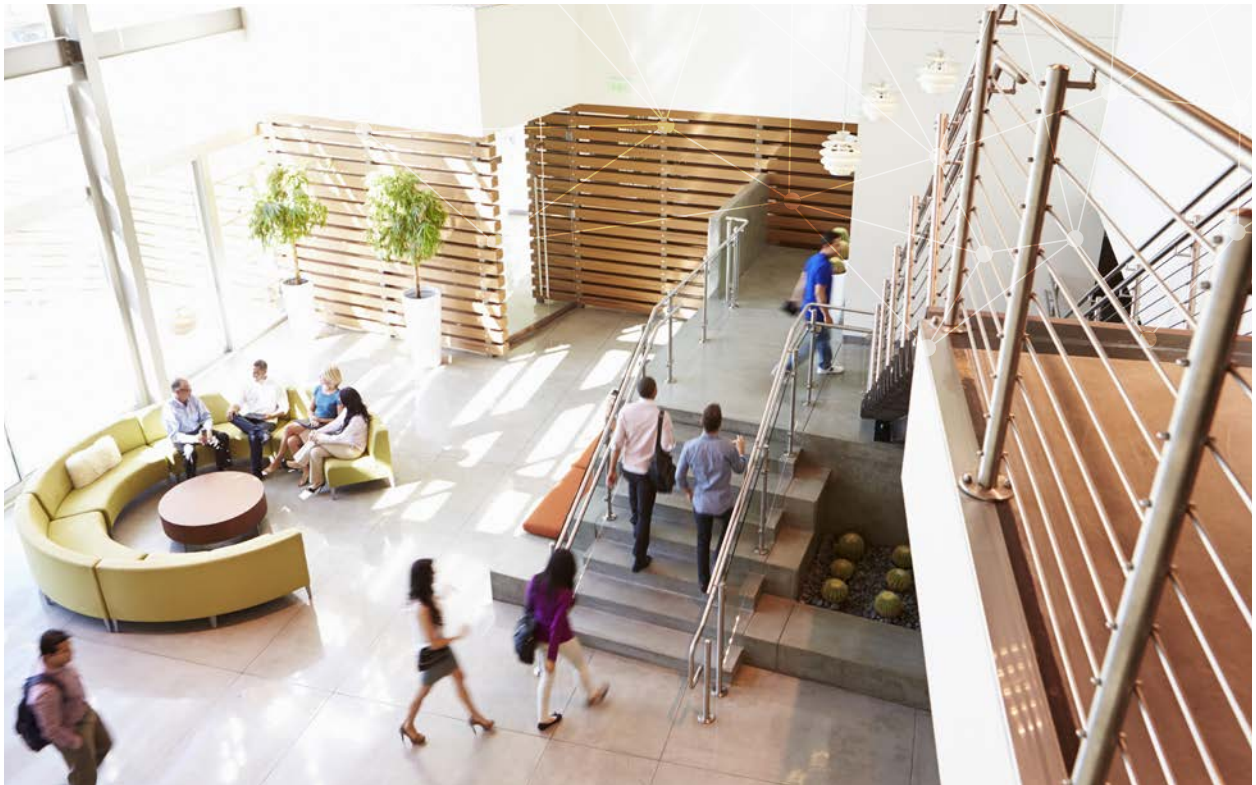

# Indoor air quality monitors

## Sauermann Portable Indoor Air Quality Monitoring System

The Sauermann Group has developed a series of four different portable indoor air quality monitoring instruments that offer all the functionality a professional air quality technician needs.

- **Si-AQ Comfort:** Entry-level model IAQ monitor for measurement of CO<sub>2</sub>, CO, temperature and relative humidity IAQ
- **Si-AQ VOC:** Expandable, handheld monitor for detection of Volatile Organic Compounds (VOCs) and harmful gasses
- **Si-AQ Expert:** Portable IAQ Monitor with up to 7 gases sensors for testing indoor air quality in warehouses, office buildings, and other industrial settings
- **Si-AQ Pro:** Handheld instrument for testing indoor air quality in homes, offices and other light industrial settings



# Product overview

## Si-AQ monitors




Si-AQ Comfort



Si-AQ Pro



Si-AQ VOC



Si-AQ PCSoft



Bluetooth® Printer



Si-AQ Expert

By offering Indoor Air Quality (IAQ) professionals the ability to custom tailor their IAQ Monitors to meet their own specific requirements. Build your Indoor Air Quality monitor to detect for anywhere from one gas measurement (CO<sub>2</sub> only) up to seven total gas sensors in a single IAQ Monitor.



**REAL-TIME Continuous  
Data Logging**



**Wireless Communications  
with Bluetooth®**



**Active Internal Sampling  
Pump**




**PC Software and  
USB Included**



**Barometric Air Pressure**



**Light Weight, Durable and  
Easy-to-Transport Design**




**Large Internal Memory**



**Li-Ion Rechargeable Battery**



**Easy to Use Menu System**

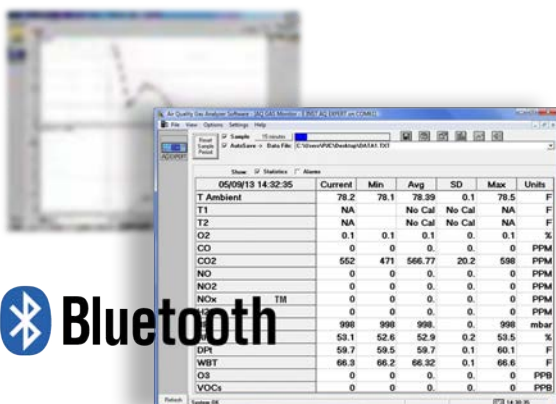

**Si-AQ PCSoft**

PC software

- Real-time continuous data logging for graphs, maximum, minimum, average for all Indoor Air Quality parameters
- Alarms settings for every air quality parameter including recording the time duration that alarms have been exceeded
- Variety of saving and printing options
- Wireless communications with Bluetooth®

# Technical information

## Si-AQ monitors



Si-AQ Comfort

Si-AQ Pro

Si-AQ VOC

Si-AQ Expert

% Relative Humidity, Dew Point, Wet Bulb	Optional	✓	✓	✓
Ambient Temperature Measurement	✓	✓	✓	✓
Differential Pressure Measurement	✓	✓	✓	✓
Barometric Pressure Measurement	Optional	✓	✓	✓
Real-Time Data Logging Software	Optional	✓	✓	✓
Continuous Sampling Pump	✓	✓	✓	✓
Internal Memory	2,000 Tests	2,000 Tests	2,000 Tests	2,000 Tests
Wireless Bluetooth® Printer	Optional	Optional	Optional	Optional

### Gas Sensor Options

Upgradeable: Includes Up to <b>Three (3)</b> Gas Sensors	-	✓	✓	-
Upgradeable: Includes Up to <b>Seven (7)</b> Gas Sensors	-	-	-	✓
O <sub>2</sub> (0 - 25 %)	-	Optional	Optional	Optional
CO <sub>2</sub> (0 - 5,000 ppm)	✓	Optional	Optional	Optional
CO (0 - 200 ppm)	Optional	Optional	Optional	Optional
H <sub>2</sub> S (0 - 100 ppm)	-	Optional	Optional	Optional
TVOC's (0 - 20,00 ppb OR 0 - 200 ppm)	-	-	✓	Optional
Formaldehyde (0 - 10,000 ppb)	-	Optional	Optional	Optional
NO (0 - 250 ppm)	-	Optional	Optional	Optional
NO <sub>2</sub> (0 - 20 ppm)	-	Optional	Optional	Optional
SO <sub>2</sub> (0 - 20 ppm)	-	Optional	Optional	Optional
O <sub>3</sub> (Ozone: 0 - 5 ppm)	-	-	-	Optional

\* CO, CO<sub>2</sub>, Temp & %RH Only

\* Add Up to 3 Gas Sensors

\* TVOC Sensor Included, Add Up to 2 More Gas Sensors

\* Add Up to 7 Total Gas Sensors


No matter what industry you work in, Sauermann IAQ Monitors deliver the data you need to get the job done:

- Industrial Hygiene
- Environmental Health and Safety (EH&S)
- Indoor Air Quality Specialists
- Universities
- Laboratory and Research
- Incubators
- Volatile Organic Gases (VOC) Monitoring
- Medical and Hospitals
- Mining/Confined Spaces
- Warehouse Safety
- Optimization: Emissions and Air Quality Issues
- Greenhouses
- Building Inspections/Architect/Building Development
- Energy Auditing
- Fugitive Emissions
- General IAQ



# Services

## Calibration / Hotline / Maintenance

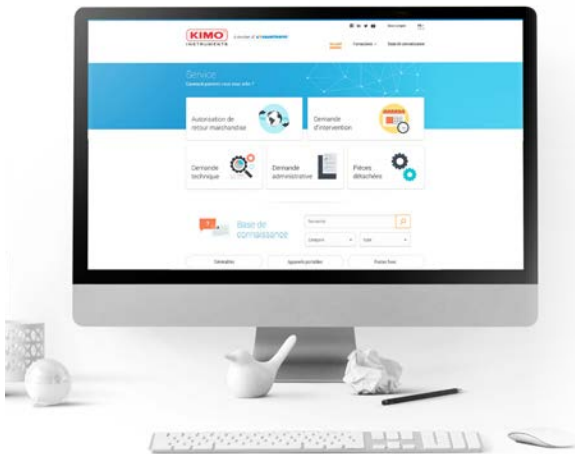

### Customer service portal

For any repair, calibration or device feedback requests, log in to our Customer Service Portal.



Accessible  
24/7



Fast and  
easy-to-use



Follow-up in  
real time

<http://kimo-en.custhelp.com>



To complement our range of measuring instruments, a team of more than 40 people offers a wide range of services, such as calibration and adjustments, after-sales support, hotline, on-site services and training.

Our team of experts will accompany you throughout your project and will adapt to your needs thanks to more than 40 years of experience and our sophisticated laboratory equipment.



Calibration and  
adjustments



After-sales  
services



Hotline



On-site services



Training

**Our laboratories, spanning over 1,500 m<sup>2</sup>, allow us to offer you all kinds of metrological services related to:**

- Temperature
- Humidity
- Air velocity
- Air flow
- Pressure
- Combustion
- Weighing
- Radiometry
- Tachometry
- Light measurement
- Electrical current



Manufacturer of innovative solutions  
for the measurement and control of  
indoor air quality.




**DISTRIBUTED BY:**  
**Sedulitas**

PEOPLE | PASSION | PRECISION

info@sedulitas.co.za +27 (0)82 551 4001  
www.sedulitas.co.za

Customer service portal  
Use our customer service portal  
to contact us.

<http://kimo-en.custhelp.com>

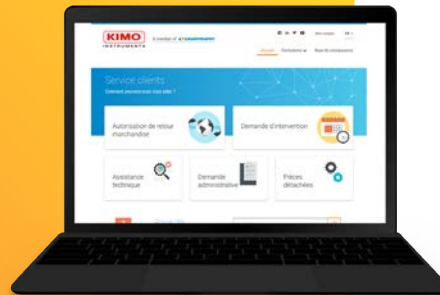

SCOPE N°2-1885  
AVAILABLE ON  
WWW.COFRAC.FR

### Accredited temperature laboratory as per ISO 17025 standard

KIMO can perform COFRAC calibrations on any type of thermometer (measuring chain, Pt100, thermocouple, etc.) within a range from -70 to +200°C in thermostatic chambers and in baths.



SCOPE N°2-5553  
AVAILABLE ON  
WWW.COFRAC.FR

### Accredited hygrometry laboratory as per ISO 17025 standard

KIMO can perform COFRAC calibrations on any type of hygrometer within a range from 10 to 95 %RH, for a dry temperature from +10 to +50°C.



More information  
[www.kimo-instruments.com](http://www.kimo-instruments.com)



**Kimo Instruments**  
Route de Férolles  
77173 Chevry-Cossigny  
FRANCE

**International**  
+33 (0)5 53 80 85 00  
kimo.international@sauer mann group.com  
www.kimo-instruments.com

A member of **sauer mann**