

WIRELESS

Data loggers

Kistock RF

Temperature / Humidity / Pressure / Current / Voltage / Pulse



Up to 100 devices in network



Remote configuration




Up to 3 years battery life



Up to 20,000 measurement points

Example of application in a restaurant

1. Communication base
2. Temperature data logger
3. Network extender
4. Alarm box

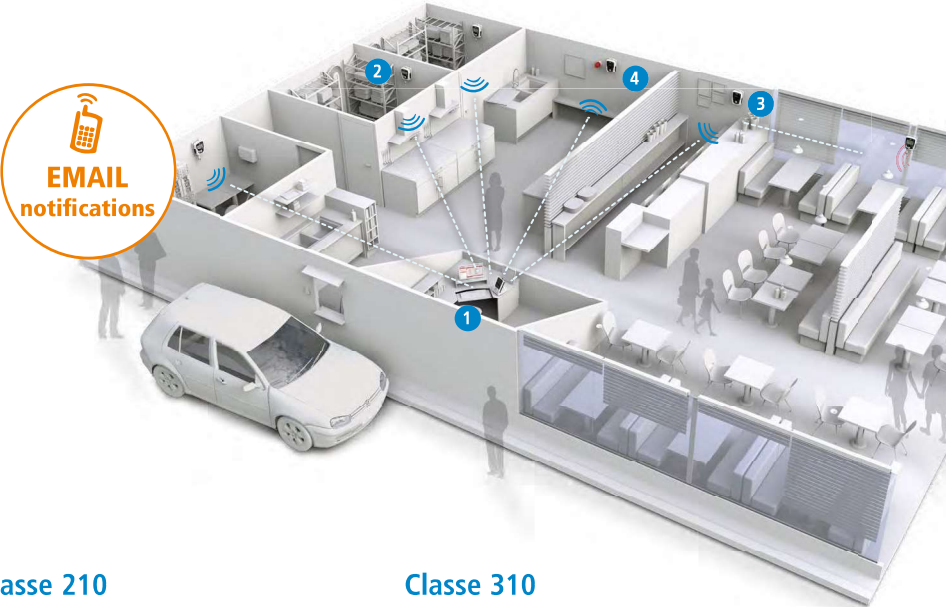

Classe 110

KT 110-RF / KT 150-RF

- Up to 1 input for external probe
- -40 to +70°C
 - 0 to 20 mA, 0 to 10 V
 - ±1,000 or ±10,000 Pa

Classe 210

KH 210-RF / KTU 210-RF

- Up to 2 inputs for external probes
- -40 to +180°C
 - 0 to 100 %RH
 - 0 to 20 mA, 0 to 10 V

Classe 310

KTR 310-RF / KTT 310-RF

- Up to 2 inputs for external probes
- Pt 100 remote probe or K, J, T, S thermocouple
 - -200 to +1,760°C
 - 0 to 20 mA, 0 to 10 V

